

Power up Your Small Network to Gigabit Speeds

Joining NETGEAR's family of Gigabit Smart Switches with web-based management, this 8-port Gigabit switch is high on value and capability. With 8 10/100/1000 Mbps ports and support for Jumbo frames, capable of powering 2000 Mbps of data throughput in full-duplex mode per port, it is ideal for small offices or extensions and connects high speed servers or power users. Ideal for combining 10, 100, and 1000 Mbps devices it delivers automatic speed and full/half-duplex sensing plus Auto Uplink™ on every port. In addition, an intuitive web-browser interface offers the simple Smart Switch management, making it easy to configure ports and set up port trunks, VLANs and traffic prioritization or monitor switch performance. Alternatively, use SNMP-based software to manage your Smart Switch.

The GS108T is equipped with highly advanced features such as Access Control Lists (ACL), 802.1x port authentication, enhanced QoS, rate limiting and IGMP Snooping among others to provide a small and medium-sized business with a network that is geared for growth while providing scalability and reliability.

Enhanced Security

These switches also provide advanced features that provide more robust security to the SMBs. These include:

- 802.1x for authentication, with Guest VLAN
- MAC-based port security

Enhanced Quality of Service

Priority queuing ensures high-priority traffic gets delivered efficiently, even during congestion from high traffic bursts. Companies implementing network telephony or video conferencing, for example, need to be able to prioritize such voice and video traffic and other real-time applications over less latency-sensitive traffic to ensure reliability and quality. The ability to prioritize traffic ensures quality of latency-sensitive services and applications despite increasing traffic loads. The ProSafe GS108T provides several advanced QoS features:


- 802.1p based prioritization
- Layer 3-based (DSCP) prioritization
- Rate-limiting

"Smart" Management Features

Manage all ProSafe Smart Switches as from an easy-to-use Web console that can be used to configure all features, as well as monitor and trouble-shoot. These switches also have SNMP (v1, v2c) to collect and track data to monitor the network health, as well as manage devices, and more easily enforce critical IT controls and policies. SNMP v2c is most commonly deployed, as it provides better reporting capabilities than SNMP v1. In addition, the GS108T also supports standards based 802.1ab: Link Layer Discovery Protocol (LLDP). This feature enables discovery of other devices in the network that support LLDP. The switch also features Link Aggregation Group (LAG) which allows trunk groups to be created. Finally, the GS108T also features 802.1w Rapid Spanning Tree (RSTP) which is backward compatible with 802.1d Spanning Tree Protocol.

These ProSafe Smart Switches provide world-class reliability with a Limited Lifetime warranty and optional ProSupport Maintenance Packages. These switches are optimized for ProSafe Network Management Software (NMS100) and works with other SNMP-based management software.

24/7
TECHNICAL
SUPPORT*1-888-NETGEAR (638-4327)
Email: info@NETGEAR.com

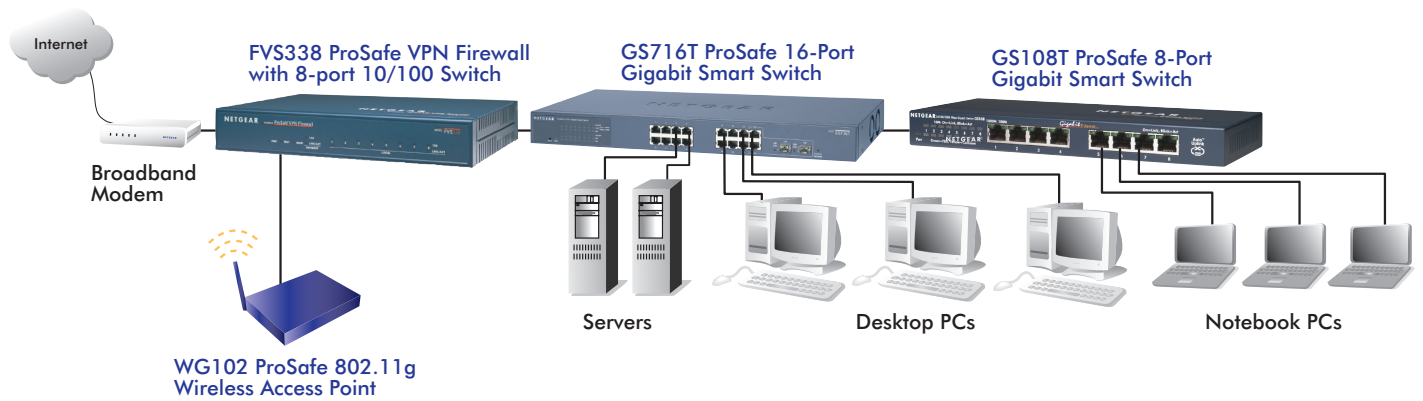

Technical Specifications

• Network Protocol and Standards Compatibility

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX
- IEEE 802.3ab 1000BASE-T
- IEEE 802.3z 1000BASE-X
- IEEE 802.3x full-duplex flow control

• Power Supply

- Power consumption: 7.68W maximum

• Network Ports

- 8 10/100/1000 Mbps auto sensing Gigabit Ethernet (GS108T)

• Physical Specifications

- Dimensions: (W x D x H)
235 x 101 x 26 mm
(9.3 x 4.0 x 1.0 in)
- Weight: 0.69 kg (1.52 lb)

• Performance Specifications

- Forwarding modes: Store-and-forward
- Bandwidth: 16 Gbps full duplex
- Network latency: Less than 20 microseconds for 64-byte frames in store-and-forward mode for 100 Mbps to 100 Mbps transmission
- Buffer memory: 128 KB embedded memory per unit
- Address database size: 8,000 media access control (MAC) addresses per system
- Addressing: 48-bit MAC address
- Mean time between failure (MTBF): 108,016 hours (~12 years)
- Acoustic noise: 0 dB

• Electromagnetic Emissions

- CE mark, commercial
- FCC Part 15 Class A
- VCCI Class A
- C-Tick

• Environmental Specifications

- Operating temperature: 32° to 104° F (0° to 50° C)
- Storage temperature: -4° to 158° F (-20° to 70° C)
- Operating humidity: 90% maximum relative humidity, non-condensing
- Storage humidity: 95% maximum relative humidity, non-condensing
- Operating altitude: 10,000 ft (3,000 m) maximum
- Storage altitude: 10,000 ft (3,000 m) maximum

• LEDs

- Per port: (10/100 and Gigabit): Link/ Activity, Speed
- Per device: Power

• Electromagnetic Immunity

- EN 55024

• Safety

- CE mark, commercial
- cUL IEC950/EN60950

• Administrative Switch Management

- IEEE 802.1Q Static VLAN (256 groups, Static)
- Port-based VLAN (8 groups)
- IEEE 802.1p Class of Service (CoS)
- Port-based QoS
- DSCP-based QoS
- IEEE802.3ad Link Aggregation (manual or LACP)
- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
- IEEE 802.1ab Link Layer Discovery Protocol (LLDP)
- SNMP v1, v2c
- RFC 1213 MIB II
- RFC 1643 Ethernet Interface MIB
- RFC 1493 Bridge MIB
- RMON group 1, 2, 3, 9

- RFC 2131 DHCP client

- IEEE 802.1x with Guest VLAN
- Jumbo frame support
- Port-based security by locked MAC addresses
- Storm control for broadcast, multicast and unknown unicast packets
- IGMP Snooping v1/v2
- Port-based ingress & egress rate limiting
- STNP
- Port Mirroring Support (Many to one)
- Web-based configuration
- Configuration Backup/Restore
- Password Access Control
- RADIUS Support
- Syslog
- Firmware upgradeable

System Requirements

- Category 5 UTP network cables or above
- Network card for each PC
- Network software (e.g., Windows®)
- Web Browser (e.g., Internet Explorer 5.0 or higher, Netscape 6.0 or higher)

Warranty

- NETGEAR Lifetime Warranty†

ProSupport Service Packs Available

• On Call 24 x 7

- PMB0331-100 (US)
- PMB0331 (non-US)

• Xpress HW

- PRR0331

Package Contents

- 8-port Gigabit Smart Switch (GS108T)
- Rubber footpads
- Power cord
- Wallmount kit
- Resource CD
- Installation guide
- Warranty/support information card

Ordering Information

- North America: GS108T-100NAS
- Europe: GS108T-100EUS
- Asia: GS108T-100AUS
- Japan: GS108T-100JPS

NETGEAR®

350 E. Plumeria Drive
San Jose, CA 95134-1911
1-888-NETGEAR (638-4327)
E-mail: info@NETGEAR.com
www.NETGEAR.com

© 2009 NETGEAR, Inc. NETGEAR, the NETGEAR Logo, NETGEAR Digital Entertainer Logo, Connect with Innovation, FrontView, IntelliFi, PowerShift, ProSafe, ProSecure, RAIDar, RAIDiator, RangeMax, ReadyNAS, Smart Wizard, X-RAID, and X-RAID2, are trademarks and/or registered trademarks of NETGEAR, Inc. and/or subsidiaries in the United States and/or other countries. Mac and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. All rights reserved.

This product comes with a limited warranty, the acceptance of which is a condition of sale.

*Basic technical support provided for 90 days from date of purchase.

†Lifetime warranty for product purchased after 05/01/2007. For product purchased before 05/01/2007, warranty is 5 years.